



EVOLEN d.o.o. • Osječka 92 • HR-44330 Novska • MB: 2480905 • OIB: 75974843041  
T. +385 (0) 44 608 728 F. +385 (0) 44 608 736 www.evolen.hr mail: evolen@evolen.hr


**Product datasheet**

15.01.2015.

Item no: 212 100

**Decking - rounded / european ash**

**20 x 100**

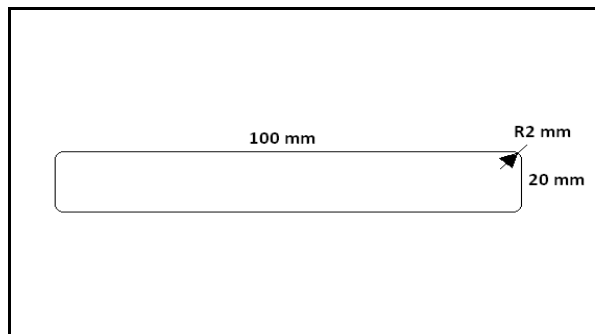

**Product description:**

Decking - rounded is produced from FSC certified European ash, which is treated only with heat and steam, without any chemical edit.

The process of thermo treatment gives a unique wood material with 1st class durability, high water resistance, dark-brown colour and exclusive appearance.

After use can be disposed in the same way as ordinary hardwood.

**Dimensions:**

Profil	Rounded
Thickness	20 mm
Width	100 mm
Length	800 / 1.000 / 1.200 / 1.400 1.600 / 1.800 / 2.000 2.200 / 2.400 mm

**Quality:**

Knots	3 - side clear
Cuping	Max 1 % of width
Crooks	Max 3 mm / 2 m
Cracks	No cracks
Wane	No waney edge
Moisture	5,5 - 7 % (Ex works)

**Technical data of thermo treated ash:**

Density:	590	Kg/m <sup>3</sup>
Hardness:	30	N/mm <sup>2</sup>
Bending strenght:	96,6	N/mm <sup>2</sup>
Equilibrium moisture:	5,5 - 7	%
Colour:	Macchiato brown	
Surface:	Smooth or ribbed	
Resistente class:	1, very resistant	

**Estetics:**

Delivered macchiato brown and develops an special silver - grey patina when exposed to sunlight and moisture, without coating. It is recommended to apply coating annually, two layers of special oil.

**Environment:**

Waste handling as ordinary wood.